
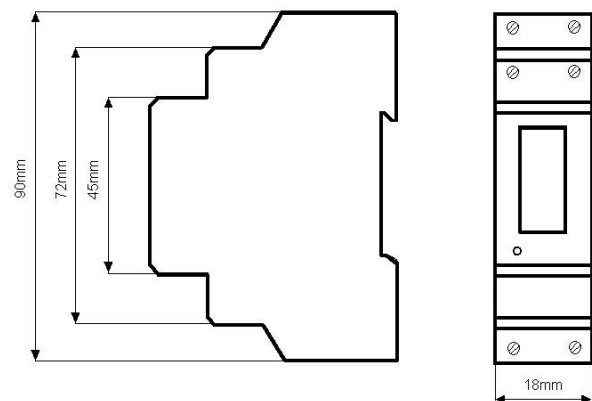


Single Phase Energy Meter for direct connection up to 25A

- Nominal voltage  $U_n$ : 230 V AC (184 ... 265 V)
- Maximum current  $I_{max}$ : 25 A
- range of measurement: 0,025 ... 25 A
- Accuracy class: 1, B, (+/- 1%)
- Start-up current: 22mA
- Nominal frequency  $f_n$ : 50Hz
- Operating frequency: 40 – 60 Hz
- Own consumption: <0,4 W
- Operating Temperature range: -20°C ... +65°C
- Storage Temperature range: -40°C ... +70°C
- S0-Impulseoutput: 2'000 Imp./kWh ( $t_i= 40ms$ )
- Display: LCD, 00000,00 kWh
- Operation position: Discretionary
- Return stop
- In conformity with CE
- In conformity with IEC 1036
- Weight: ca. 110g

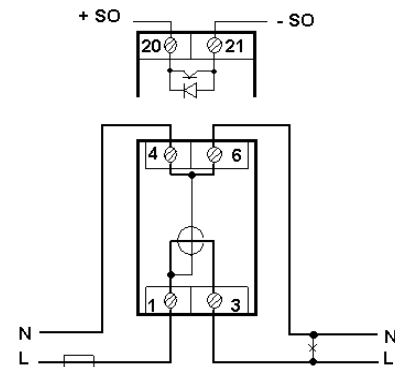

Subject to change without notice  
1th January 2010, SK