


## Clappstromwandler KBU23 und KBU58


	Strom	Belastung (VA) / Klasse	Art. Nr
<b>KBU23</b>	100	1.25 / 1	940020
	150	1.5 / 1	940021
	200	1.5 / 1	940022
	250	1.5 / 1	940023
	300	1.5 / 1	940024
	400	1.5 / 1	940025

	Strom	Belastung (VA) / Klasse	Art. Nr
<b>KBU58</b>	400	5 VA / 1	940033
	500	5 VA / 1	940036
	600	5 VA / 1	940034
	750	5 VA / 1	940037
	800	7.5 VA / 1	940038
	1'000	10 VA / 1	940039

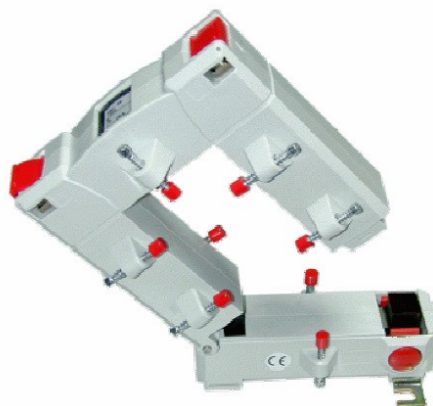

Stromwandler	Breite A (mm)	Höhe B (mm)	Tiefe C / C1 (mm)	Gewicht (kg)
<b>KBU23</b>	93	106	34 / 58	0.85
<b>KBU58</b>	125	152	34 / 58	1.08

Schienenfenster	Breite D (mm)	Länge E (mm)
<b>KBU23</b>	20	30
<b>KBU58</b>	50	80

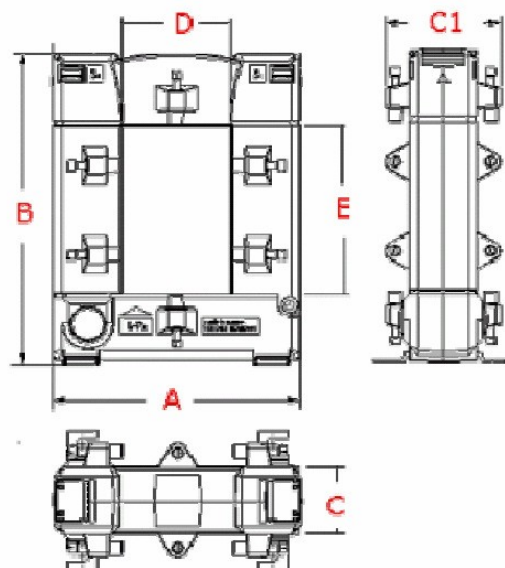

Änderungen und Irrtümer vorbehalten  
23. Dezember 2009, SK